

WOOL FIRES

The 2018 Collection













CONTENTS

Masport Heating	2
Wood Fires	5
Choosing The Right Fire For You	6
Inbuilt Zero Clearance (ZC)	7
Freestanding Fires	8
Inbuilt Fires	24
Technical Specifications	26
Spare Parts Webshop	29
About Wood Fires	30
Masport Heating Tips	33







Masport proudly supports the activities of Landcare Australia through its membership of the AHHA



Masport heating is a brand that reflects its values through its product.

Superior build quality, extensive research and development, rigorous quality control and a guarantee of workmanship are values that are synonymous with Masport Heating. Glen Dimplex is the largest manufacturer of wood fires in Australasia and incorporates a high level of equipment and facilities unrivaled by any other manufacturer in Australasia. As a consequence, our product range is extensive and offers great value for money.

We at Masport Heating have in-depth knowledge of solid fuel heating and continue to invest a great deal of time and money into innovative wood fire design and development. Our range of wood fires are a result of our intense research and over the years we have been at the forefront of the new generation of clean burning ultra efficient fires. These are advanced appliances that provide reliable warmth to the entire house and all with an amazing degree of control, economy, aesthetic appeal and environmental friendliness.


Masport Heating is committed to producing the best solid fuel burners in Australasia and our confidence is reflected in our 10 year fire box warranty on our entire wood fire range. Rest assured that you are buying a quality product from a reliable and renowned wood fire manufacturer.

For more information, please view our latest range of products on offer in this catalogue or visit our website www.masportheating.com.au.

The key to an efficient, long-lasting fire lies in the design and construction of the superior cast iron firebox.

The Masport Heating cast iron fireboxes feature an advanced panel design with an integrated array of heat dispersing fins that can increase the surface area by up to 65%. The result is a superior wood fire that transfers heat from the cast iron firebox, through the fins and into the room efficiently. The added thickness plus the height of the fins gives extra mass and surface area to the cast iron firebox. This in return has the ability to retain the heat and distribute the warmth efficiently for longer periods even after the fire has died down.



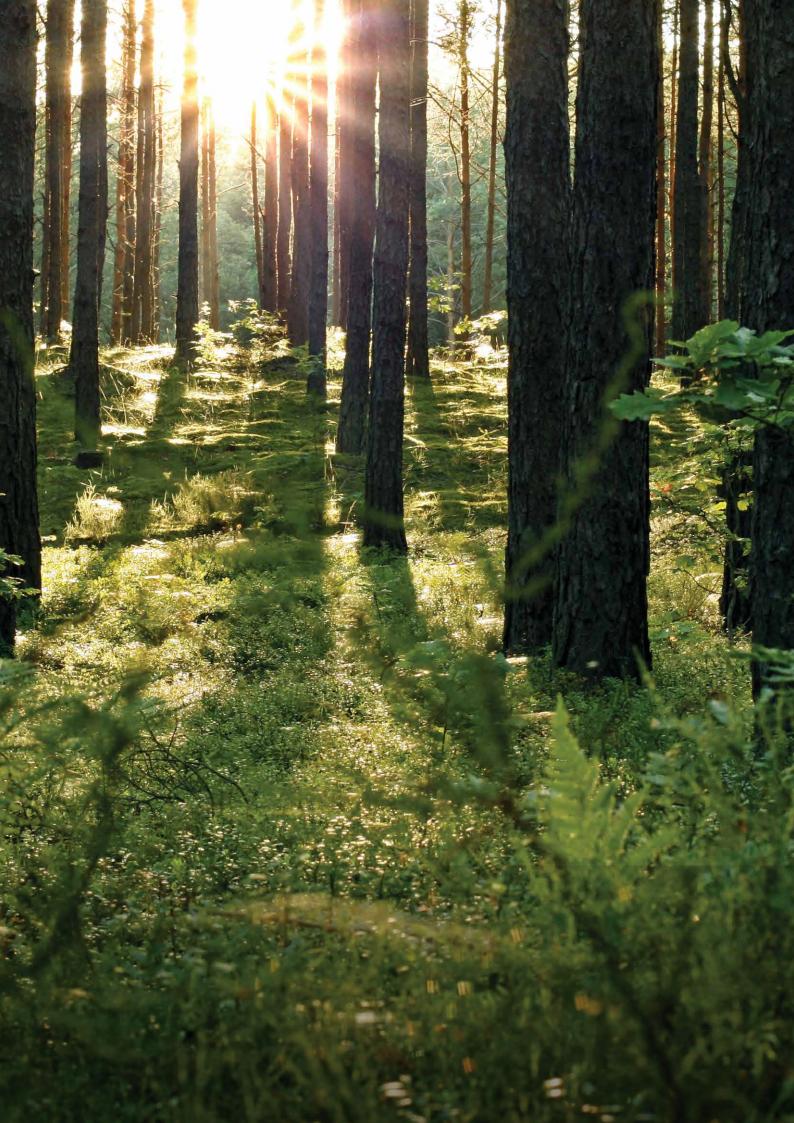



Why buy a Wood Fire?

- Wood is a carbon neutral product. Unlike other fuels, burning wood generates no more carbon dioxide (CO2) than if it was left to decompose naturally.
- A wood fire is an energy efficient way of heating.
 They are designed to heat your entire house.
- A wood fire is also a multi-purpose fire.
 Apart from being your primary heat source it can be used in line with a heat transfer/ventilation system.
- It is a smart and cost effective method of heating.
 Running a wood fire is one of the cheapest forms of heating.
- Wood is a renewable energy source. Therefore making it a sound environmental choice.
- Whatever your heating requirement there's a range of models and options to choose from.

5 Great Reasons to Choose a Masport Wood Fire...

- 1/ Masport Heating is Australasia's largest wood fire manufacturer.
- 2/ All Masport wood fires comply with the AHHA Emission Standards (AS/NZS 4013)
- 3/ Huge range of environmentally friendly clean burning models.
- 4/ Fully brick-lined firebox with steel baffles for efficient heating.
- 5/ Comprehensive range of convection and radiant fires to suit a multitude of house designs.
- 6/ Firebox warranty up to 10 years.





When choosing a wood fire, there are a couple of things to consider to make sure you get the right one for your space. What type of fire best suits your room? What type of firebox is best?

There are two main types of clean burning fires: Convection fires and Radiant fires. A convection fire has a casing around the firebox which allows the air to flow. As the air passes the firebox, it is heated. This action is known as convection.

Convection fires provide a more even heat to the room. The air is warmed from the ceiling down. It operates in a cycle where it heats the air surrounding the ceiling area first and then pushing the warm air down. The convection fire is more suitable for a room or house with a standard ceiling height and where more even heat distribution is desired.

Radiant fires heat quickly and if you sit close to them you can get warm even if the whole room has not had time to warm up. A radiant fire transfers about two thirds of its heat by radiation and one third by convection. A radiant fire is more suitable for rooms with high ceilings.

The two types of fireboxes to choose from are Cast Iron and Steel. Cast iron fireboxes generally take a little longer to heat up but also longer to cool once the fire has burned down. They offer superior durability and all Masport cast iron fireboxes come with a 10 year warranty.

Steel fireboxes operate the opposite way and heat up quicker but also cool quicker. If you plan to use your wood fire just a few times a week, a steel box would most likely be the better choice for you.



Have you ever wanted to have an attractive insert fireplace but been put off by the need for an expensive remodeling of your house?

Now almost any wall can be quickly and safely converted to accommodate an insert fireplace with our Zero Clearance (ZC) range of fires - LE7000, I5000 and I9000.

This range enables you to have an insert fireplace installed into almost any wall, while protecting floors and walls constructed from combustible materials. Find out more about Zero Clearance (ZC) fires on pages 22 and 23.





FINLEY

Preceding model F2000

The Finley efficiently heats small to medium sized areas. The flush front window gives a warm open feeling and the glass door opens past 90° to make refuelling easier.

- Heats small to medium sized areas
- Superior heat from a fully finned cast iron firebox and triple air combustion system
- Standard 2-speed fan for faster heat circulation
- · Fitted with masonry bricks and steel baffle
- Smooth release door latch with adjustable door hinges

FINISH	VHT Black
FIREBOX	Cast Iron
EST. PEAK OUTPUT	17kW
APPROX. HEAT AREA	170m²
EMISSIONS	1.2g/kg
EFFICIENCY	64%
CIRCULATION	2-speed convection fan
DIMENSIONS (WxDxH)	580 x 474 x 660mm
FIREBOX DIMENSIONS (WxDxH)	352 x 340 x 276mm
LOG SIZE	370mm



FAWKNER

Preceding model F3000

This modern day versatile fire can fit into any room easily, and match any style. It's perfect for medium to large areas and has a large flat glass door that opens past 90° to make refuelling easier.

- Heats medium to large sized areas
- Superior heat from a fully finned cast iron firebox and triple air combustion system
- Standard 2-speed fan for faster heat circulation
- Fitted with masonry brick and steel baffle
- Smooth release door latch with adjustable door hinges

FINISH	VHT Black
FIREBOX	Cast Iron
EST. PEAK OUTPUT	19kW
APPROX. HEAT AREA	190m²
EMISSIONS	0.8g/kg
EFFICIENCY	66%
CIRCULATION	2-speed convection fan
DIMENSIONS (WxDxH)	662 x 505 x 755mm
FIREBOX DIMENSIONS (WxDxH)	496 x 385 x 281mm
LOG SIZE	450mm







FERNBANK

Preceding model F7000

The Fernbank offers an ultra stylish alternative look for the modern day home. With its huge heating capacity, it's perfect for warming large areas and it's panoramic glass door allows for optimum view of your log fire.

- Heats large sized areas
- Superior heat from a fully finned cast iron firebox and triple air combustion system
- Standard 2-speed fan for faster heat circulation
- Fitted with masonry brick and steel baffle
- Smooth release door latch with adjustable door hinge
- Included wet back option

FINISH	VHT Black
FIREBOX	Cast Iron
EST. PEAK OUTPUT	24kW
APPROX. HEAT AREA	240m²
EMISSIONS	1.1g/kg
EFFICIENCY	58%
CIRCULATION	2-speed convection fan
DIMENSIONS (WxDxH)	685 x 583 x 835mm
FIREBOX DIMENSIONS (WxDxH)	495 x 436 x 345mm
LOG SIZE	450mm



FAIRHAVEN

Preceding model F12000

With its large capacity and powerful output, the Fairhaven is a stylish choice for large rooms and open plan spaces. The panoramic bay window design offers you an expansive view of the fire from all corners of the room.

- Heats very large areas with extended burn time
- Magnificent heat and superior burn with a fully finned 6mm cast iron firebox and triple air combustion system
- 175mm flue to ensure complete burn
- Standard 2-speed fan for faster heat circulation
- Integrated ash shelf to collect ash and make disposal easier
- Smooth release door latch with adjustable door hinge
- Fitted with masonry bricks and steel fire baffle
- Removable top plate for cooking (note: decorative mesh needs to be replaced by a shield for this feature)

FINISH	VHT Black
FIREBOX	Cast Iron
LOUVRE/GRILL	Silver
EST. PEAK OUTPUT	28kW
APPROX. HEAT AREA	280m ²
EMISSIONS	2g/kg
EFFICIENCY	58%
CIRCULATION	2-speed convection fan
DIMENSIONS (WxDxH)	760 x 620 x 800mm
FIREBOX DIMENSIONS (WxDxH)	592 x 435 x 342mm
LOG SIZE	540mm





RYLSTONE

Preceding model Atlanta

Efficient and practical solution to warm up large spacious areas.

- Heats medium to large sized areas
- Efficiently heats areas up to 230m²
- 6mm steel firebox for durability
- Removable top grill for cooking
- Lined with masonry fire bricks and a steel baffle for efficient burning
- 2-speed fan for faster heat circulation

FINISH	VHT Black
FIREBOX	Steel
LOUVRE/GRILL	Silver
EST. PEAK OUTPUT	23kW
APPROX. HEAT AREA	230m²
EMISSIONS	1.7g/kg
EFFICIENCY	59%
CIRCULATION	2-speed convection fan
DIMENSIONS (WxDxH)	640 x 595 x 754mm
FIREBOX DIMENSIONS (WxDxH)	450 x 517 x 267mm
LOG SIZE	400mm





Preceding model R1600

The Redbank is a radiant and convection heater. The built-in ash pan ensures that disposal of ash is easy and convenient.

- Heats small to medium sized areas
- Flat radiant top allows for cooking
- Optional 2-speed fan for convection heating
- · Lined with masonry fire bricks and a steel baffle for efficient burning
- 6mm top plate and baffle for durability
- Built-in ash pan to collect ash and make disposal easier

FINISH	VHT Black
FIREBOX	Steel
EST. PEAK OUTPUT	15kW
APPROX. HEAT AREA	150m²
EMISSIONS	1.1g/kg
EFFICIENCY	62%
DIMENSIONS (WxDxH)	600 x 500 x 658mm
FIREBOX DIMENSIONS (WxDxH)	372 x 316 x 284mm
LOG SIZE	320mm



RIVERSTONE

Preceding model R5000

The Riverstone will heat small to medium sized areas. The built-in ash pan ensures that disposal of ash is easy and convenient.

- Efficiently heats small to medium sized areas
- Large 8mm radiant cook top
- Optional 2-speed fan for convection heating
- 6mm steel firebox for durability
- Lined with masonry fire bricks and a steel baffle for efficient burning
- Built-in ash pan to collect ash and make disposal easier

FINISH	VHT Black
STAND	Pedestal
FIREBOX	Steel
EST. PEAK OUTPUT	19kW
APPROX. HEAT AREA	190m²
EMISSIONS	1.3g/kg
EFFICIENCY	60%
DIMENSIONS (WxDxH)	700 x 576 x 720mm
FIREBOX DIMENSIONS (WxDxH)	450 x 389 x 323mm
LOG SIZE	400mm





REDWOOD

Preceding model R12000

Supreme output and efficiency, for abundantly heating open plan spaces.

- Efficiently heats huge areas
- Large 8mm radiant cook top
- Optional 2-speed fan for convection heating
- 6mm steel firebox for durability
- Lined with masonry fire bricks and a steel baffle for efficient burning
- Built-in ash pan to collect ash and make disposal easier

FINISH	VHT Black
FIREBOX	Steel
EST. PEAK OUTPUT	30kW
APPROX. HEAT AREA	300m ²
EMISSIONS	0.8g/kg
EFFICIENCY	64%
DIMENSIONS (WxDxH)	790 x 715 x 799mm
FIREBOX DIMENSIONS (WxDxH)	605 x 470 x 365mm
LOG SIZE	560mm



ROYSTON

Preceding model R1500WS

A practical storage solution teamed with heat, efficiency and style

- NES and ECAN clean air approved
- Heats small to medium sized areas
- 6mm flat radiant cook top and 6mm steel firebox for durability
- Handy storage space for wood

FINISH	VHT Black
FIREBOX	Steel
EST. PEAK OUTPUT	15kW
APPROX. HEAT AREA	150m ²
EMISSIONS	1.1g/kg
EFFICIENCY	62%
DIMENSIONS (WxDxH)	600 x 500 x 743mm
FIREBOX DIMENSIONS (WxDxH)	372 x 316 x 284mm
LOG SIZE	320mm



RAVENHALL

Preceding model R5000WS

The Ravenhall will heat small to medium sized areas.

- Efficiently heats small to medium sized areas
- Large 8mm radiant cook top
- Optional 2-speed fan for convection heating
- 6mm steel firebox for durability
- Lined with masonry fire bricks and a steel baffle for efficient burning
- Handy storage space for wood
- Built-in ash drawer to collect ash and make disposal easier

FINISH	VHT Black
FIREBOX	Steel
EST. PEAK OUTPUT	19kW
APPROX. HEAT AREA	190m ²
EMISSIONS	1.3g/kg
EFFICIENCY	60%
DIMENSIONS (WxDxH)	700 x 576 x 804mm
FIREBOX DIMENSIONS (WxDxH)	450 x 389 x 323mm
LOG SIZE	400mm





ADENA

The new Adena provides a sleek, curved design fitting of today's modern home and yet still adds a touch of elegance to a villa of yesteryear. The Adena will not only make a statement, but also keep your home warm this winter.

- Heats small to medium sized areas
- Efficiently heats areas up to 162m²
- 6mm steel firebox for durability
- Radiant 6mm cooktop
- Lined with ceramic fire bricks and a steel baffle for efficient burning

FINISH	VHT Black
FIREBOX	Steel
EST. PEAK OUTPUT	16.2kW
APPROX. HEAT AREA	162m ²
EMISSIONS	1.0g/kg
EFFICIENCY	60.0%
DIMENSIONS (WxDxH)	481 x 536 x 1025mm
FIREBOX DIMENSIONS (WxDxH)	265 x 325 x 410mm
LOG SIZE	290mm









ADENA WOODSTACKER

The new Adena is also available in a woodstacker model to add convenience, while still providing a sleek, modern style to your home.

- Heats small to medium sized areas
- Efficiently heats areas up to 162m²
- 6mm steel firebox for durability
- Radiant 6mm cooktop
- Lined with ceramic fire bricks and a steel baffle for efficient burning

FINISH	VHT Black
FIREBOX	Steel
EST. PEAK OUTPUT	16.2kW
APPROX. HEAT AREA	162m ²
EMISSIONS	1.0g/kg
EFFICIENCY	60.0%
DIMENSIONS (WxDxH)	481 x 536 x 1025mm
FIREBOX DIMENSIONS (WxDxH)	265 x 325 x 410mm
LOG SIZE	290mm







WESTCOTT 1000

A compact cast-iron wood radiant fire which will heat small areas. Top and rear flue options make for versatile installation. Designed in New Zealand.

- · Heats small sized areas
- · Cast-iron construction, with cooktop, grate and ashpan
- Airwash system to maintain clear door glass

FINISH	Black
FIREBOX	Cast Iron
APPROX. HEAT AREA	50m ²
EMISSIONS	2.3g/kg
EFFICIENCY	66%
DIMENSIONS (WxDxH)	416 x 336 x 540mm
FIREBOX DIMENSIONS (WxDxH)	300 x 230 x 200mm
ESTIMATE PEAK OUTPUT	5kW
LOG SIZE	300mm

WESTCOTT 2000

The solid construction of the Westcott 2000 will keep small to medium areas of your home cosy this Winter. Designed in New Zealand.

- · Heats small to medium sized areas
- · Cast-iron construction, with cooktop, grate and ashpan
- · Airwash system to maintain clear door glass

FINISH	Black
FIREBOX	Cast Iron
APPROX. HEAT AREA	80m ²
EMISSIONS	1.9g/kg
EFFICIENCY	55%
DIMENSIONS (WxDxH)	544 x 309 x 554mm
FIREBOX DIMENSIONS (WxDxH)	420 x 200 x 230mm
ESTIMATE PEAK OUTPUT	8kW
LOG SIZE	400mm

WESTCOTT 3000

With dual side opening doors and brushed steel handles, this radiant wood fire will make a statement in any room. Designed in New Zealand.

- · Comfortably heats small to medium sized areas
- Cast-iron construction with cooktop, grate and ashpan
- Airwash system to maintain clear door glass

FINISH	Black
FIREBOX	Cast Iron
APPROX. HEAT AREA	150m ²
EMISSIONS	1.5g/kg
EFFICIENCY	65%
DIMENSIONS (WxDxH)	652 x 356 x 640mm
FIREBOX DIMENSIONS (WxDxH)	520 x 245 x 300mm
ESTIMATE PEAK OUTPUT	12kW
LOG SIZE	500mm



KLONDIKE

The classic, North American styling of the Klondike makes it an attractive eye catcher and will give you a cosy, secure glow to any room. Designed in New Zealand.

- Heats medium to large sized areas
- Estimated 10kW heat output
- Radiant circulation
- Efficient cooktop for cooking or boiling water
- Finished in rugged black cast iron
- Ashpan for convenient cleaning

FINISH	Black
FIREBOX	Cast Iron
EST. PEAK OUTPUT	10kW
APPROX. HEAT AREA	100m ²
EMISSIONS	1.3g/kg
EFFICIENCY	67%
DIMENSIONS (WxDxH)	380 x 460 x 650mm
LOG SIZE	250mm



PITTSBURGH MKII

Enjoy the traditional feel that comes with the Pittsburgh stove. This stove is perfect for medium to large sized areas and will add an elegant feel to your room. Designed in New Zealand.

- Heats medium to large sized areas
- Estimated 15kW heat output
- Radiant circulation
- Efficient cooktop for cooking or boiling water
- Finished in rugged black cast iron
- · Ashpan for convenient cleaning

FINISH	Black
FIREBOX	Cast Iron
EST. PEAK OUTPUT	15kW
APPROX. HEAT AREA	150m²
EMISSIONS	1.5g/kg
EFFICIENCY	68%
DIMENSIONS (WxDxH)	510 x 580 x 850mm
LOG SIZE	300mm

INBUILT













12000

Sleek contemporary looks that define extraordinary fires from the ordinary.

- Efficiently heats small to medium sized areas
- 6mm steel firebox for durability
- 2-speed convection fan for faster heat circulation
- Fitted with masonry bricks and steel baffle for durability
- For masonry installations only

FINISH	Metallic black paint with black trim
FIREBOX	Steel
EST. PEAK OUTPUT	12kW
APPROX. HEAT AREA	120m²
EMISSIONS	1.1g/kg
EFFICIENCY	58%
CIRCULATION	2-speed convection fan
DIMENSIONS (WxDxH)	595 x 470 x 590mm (Insert)
FIREBOX DIMENSIONS (WxDxH)	450 x 389 x 310mm
LOG SIZE	400mm

15000

Sleek contemporary looks that define extraordinary fires from the ordinary.

- Efficiently heats areas up to 160m²
- Superior heat from a fully finned 6mm cast iron firebox and triple air combustion system
- Standard 2-speed convection fan for faster heat circulation
- Fitted with masonry bricks and steel baffle for durability
- Suitable for masonry recess installations and ZC applications

FINISH	Metallic black paint with black trim
FIREBOX	Cast Iron
LOUVRE/GRILL	Black
EST. PEAK OUTPUT	16kW
APPROX. HEAT AREA	160m ²
EMISSIONS	1.5g/kg
EFFICIENCY	56%
CIRCULATION	2-speed convection fan
DIMENSIONS (WxDxH)	600 x 470 x 590mm (Insert) 714 x 527 x 696mm (ZC)
FIREBOX DIMENSIONS (WxDxH)	497 x 336 x 281mm
LOG SIZE	450mm



19000

Big, bold and striking, the I9000 adds great visual impact and plenty of heat for large, spacious areas.

- Efficiently heats areas up to 240m²
- Superior heat from a fully finned 6mm cast iron firebox and triple air combustion system
- Suitable for masonry recess installations and ZC applications
- Fitted with masonry bricks and steel baffle for durability
- Standard 2-speed convection fan for faster heat circulation

FINISH	Metallic black paint with black trim
	Metallic black paint with titanium trim
FIREBOX	Cast Iron
LOUVRE/GRILL	Black
EST. PEAK OUTPUT	24kW
APPROX. HEAT AREA	240m²
EMISSIONS	1.2g/kg
EFFICIENCY	55%
CIRCULATION	2-speed convection fan
DIMENSIONS (WxDxH)	760 x 565 x 695mm (Insert) 852 x 612 x 786mm (ZC)
FIREBOX DIMENSIONS (WxDxH)	590 x 434 x 341mm
LOG SIZE	540mm

LE 7000

The LE 7000 Provincial incorporates zero clearance technology so you can enjoy irresistible flames in virtually any space. This fire can be built into any wall.

- Heats medium to large sized areas
- Superior heat from a fully finned 6mm cast iron firebox and triple air combustion system
- Efficiently heats up to 210m²
- Standard 2-speed convection fan for faster heat circulation
- Suitable for masonry recess installations and ZC applications

FINISH	Metallic black paint
FIREBOX	Cast Iron
LOUVRE/GRILL	Black VHT
EST. PEAK OUTPUT	21kW
APPROX. HEAT AREA	210m ²
EMISSIONS	1.7g/kg
EFFICIENCY	56%
CIRCULATION	2-speed convection fan
CAVITY DIMENSIONS (WxDxH)	630 x 485 x 595mm (Insert) 760 x 555 x 710mm (ZC)
FIREBOX DIMENSIONS (WxDxH)	493 x 432 x 345mm
LOG SIZE	440mm








SPECIFICATIONS

CAST IRON

FREESTANDING

Clearance Required To Combustible Materials

Minimum distance to heat sensitive materials (mm) when a flue deflector is fitted, and floor protector sizes as per standard AS/NZS 2918:2001. Refer to flue shield definitions on the next page.

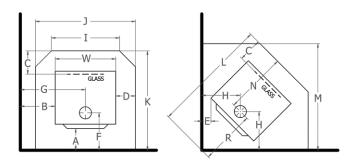

MODEL	FLUE SHIELD	А	В	С	D	E	F	G	Н	I	J	K	L	M	N	R	W
FINLEY	FUF	180	300	300	146	50	369	590	360	572	872	935	1076	963	566	510	580
FAWKNER	FUF	180	250	300	136	60	398	581	400	633	933	965	1133	1025	567	566	662
FERNBANK	FUF	225	400	300	139	125	445	743	442	663	963	1089	1269	1132	644	625	685
FAIRHAVEN	FUF	250	300	300	103	200	445	680	607	665	965	1160	1573	1347	714	858	760
WESTCOTT 1000	FSS	225	350	300	138	210	335	555	433	385	685	840	1117	926	505	612	416
WESTCOTT 2000	FUL	250	200	300	100	150	370	470	426	440	740	840	1072	913	470	602	544
WESTCOTT 3000	FUL	350	450	300	143	200	458	770	503	625	925	988	1241	1098	530	711	652
KLONDIKE	-	-	900	-	-	900	860	-	-	-	1220	1220	-	-	-	-	380
PITTSBURGH MK II	-	-	900	-	-	900	910	-	-	-	1220	1220	-	-	-	-	510


INBUILT

Clearance Required To Combustible Materials

Minimum distance to heat sensitive materials (mm) and floor protector sizes as per standard AS/NZS 2918:2001

NOTE: INSULATED FLOOR PROTECTORS

For detailed design and specifications of insulated floor protector required for below models, please refer to the installation manual.

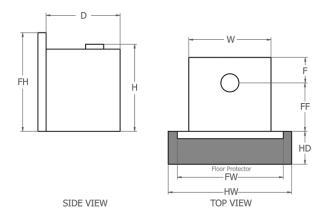


MODEL	TYPE	D	Н	W	F	FH	FW	FF	HW*	HD*
15000	INSERT	470	590	600	162	692	820	308	875	321
15000 ZC	INBUILT	527	696	714	219	740	820	308	875	440
LE7000	INSERT	485	595	630	170	715	1010	315	935	330
LE7000 ZC	INBUILT	555	710	760	240	765	1010	315	935	330
19000	INSERT	565	695	760	217	741	1024	348	1025	525
19000 ZC	INBUILT	612	786	852	264	847	1024	348	1025	525


STEEL

FREESTANDING

Clearance Required To Combustible Materials

Minimum distance to heat sensitive materials (mm) when a flue deflector is fitted, and floor protector sizes as per standard AS/NZS 2918:2001. Refer to definitions at the bottom of the page.





MODEL	FLUE SHIELD	А	В	С	D	Е	F	G	Н	1	J	K	L	М	N	R	W
ROYSTON	FUF	150	300	300	111	115	377	600	442	522	822	925	1172	1013	548	624	600
ROYSTON	AGA	400	400	300	111	140	267	700	467	522	822	815	1208	1038	548	660	600
REDBANK	FUF	150	245	300	111	115	377	545	442	522	822	925	1172	1013	548	624	600
RIVERSTONE	FUF	188	280	300	100	150	384	630	506	600	900	1028	1360	1174	644	716	700
RAVENHALL	FUF	188	280	300	100	150	384	630	506	600	900	1028	1360	1174	644	716	700
REDWOOD	FDR	213	500	300	87	240	413	895	630	664	964	1158	1611	1374	720	861	790
RYLSTONE	FUF	200	250	300	130	80	334	570	401	600	900	1102	1335	1156	768	567	640
RYLSTONE	FUL	150	300	300	130	100	284	620	421	600	900	1052	1363	1176	768	595	640
ADENA / ADENA WS	FUF	425	625	300	117	450	586	866	679	415	715	1245	1619	1291	659	960	482
ADENA / ADENA WS	FDR	250	500	300	117	320	411	741	549	415	715	1070	1435	1161	659	776	482
ADENA / ADENA WS	AGA	250	650	300	117	350	411	891	579	415	715	1070	1478	1191	659	819	482


INBUILT


Clearance Required To Combustible Materials

Minimum distance to heat sensitive materials (mm) and floor protector sizes as per standard AS/NZS 2918:2001

NOTE: INSULATED FLOOR PROTECTORS

For detailed design and specifications of insulated floor protector required for below models, please refer to the installation manual.





SIDE	VIEV

MODEL	TYPE	D	Н	W	F	FH	FW	FF	HW*	HD*
12000	INSERT	470	590	595	95	700	848	368	900	432

Flue Shield Definitions

FLUE SHIELDS	DESCRIPTION
FSS	Flomet Super Single 5".
FUF	Flomet Universal Flue system with full length decorative heat shield.
FUL	Flomet Universal Flue system with Masport double flue shield. (A top diverter plate is supplied with the Riverstone wood fire and must be installed when using the FUL flue system. For detailed specifications please refer to installation manual).
FDR	Flomet Dropbox with Single Skin Reflective Shield.
AGA	Acom/Air Group Special Insulated Flue System

SPECIFICATIONS

All Masport wood fires have been tested to AS/NZS2918:2001 using a Flo-Met Universal Flue Kit comprising a drop box and a decorative shield which is 50% solid and 50% decromesh. Use of the Masport double flue shield (part number MFIAC093) requires the removal of this decorative shield.

ESTIMATED PEAK HEAT OUTPUT

Heat output and burn time will vary depending on fuel size, type and moisture content.

CAST IRON

Freestanding

		Convec	tion Heat		Radiant Heat					
	FINLEY	FAWKNER	FERNBANK	FAIRHAVEN	WESTCOTT 1000	WESTCOTT 2000	WESTCOTT 3000	KLONDIKE	PITTSBURGH MK II	
EST. PEAK OUTPUT (KW)	17	19	24	28	5	8	12	10	15	

Inbuilt

	Co	onvection He	eat
	15000	LE7000	19000
EST. PEAK OUTPUT (KW)	16	21	24

STEEL

Freestanding Inbuilt

	Convection Heat		Rac	liant Heat		
	RYLSTONE	ROYSTON	REDBANK	RIVERSTONE / RAVENHALL	REDWOOD	ADENA
EST. PEAK OUTPUT (KW)	23	15	15	19	30	16.2

	Convection Heat
	12000
EST. PEAK OUTPUT (KW)	12


NB: It is important to note that this dimension page is a guide only. Please refer to the installation manual supplied for accurate manufacturer recommendations. All details are available on www.masportheating.com.au.

Note: Clearances are for fire hazard only. For durability of finishes or surfaces you should contact the relevant manufacturer for their specification. Glen Dimplex Australia Pty Ltd accepts no responsibility for the deterioration of surfaces or finishes.

All woodfires with a fan will require a 10amp power point to operate the fan.

For full warranty details refer to your owner's manual. All heaters must be installed and serviced by an authorised installer. Due to ongoing enhancements, specifications may change without notice. Illustrations are intended as a guide only.

Consult your dealer for flues available in your area.

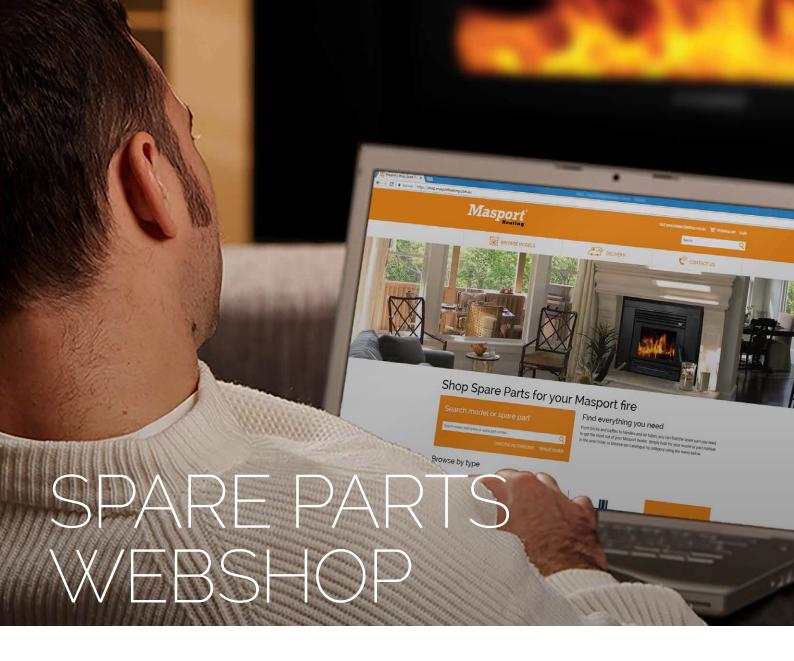

NOW YOU CAN BUY YOUR SPARE PARTS ONLINE!

From bricks and baffles to handles and air tubes, find the spare part you need to get the most out of your Masport heater.

Visit shop.masportheating.com.au





In days gone by people relied on solid wood fuel to provide the basics of life - for cooking, heating and hot water. Yet it was dirty and inefficient. How things have changed!

The research and development team at Masport Heating have dedicated years to improving the efficiency and performance of our solid wood fires. Masport Heating strives to produce appliances which exceed environmental standards, offer a range of styles and operate with efficiency never before imagined.

Today's appliances use less fuel, burn cleaner, are easier to clean, and can provide whole of home heating even in the coldest winter without fuss or mess. They can even provide back-up hot water solutions.*

*Fernbank fitted with a wetback option



ENVIRONMENTALLY FRIENDLY WOOD FIRES

Product researchers and developers have been working hard on addressing environmental issues for over a decade.

Today's combustion systems meet even the most stringent world standards.

Simply put, burning wood is a sound environmental choice because unlike other fuels burning wood generates no more carbon dioxide than if it were left on the forest floor to rot. What's more, good forest management and regular replanting would ensure that our atmosphere is continually washed of carbon dioxide, while pruning and factory off cuts could provide an ample fuel supply for the entire country. With wood you know you are playing your part in protecting the planet.



PROUDLY MADE IN NEW ZEALAND

All Masport Woodfires* are manufactured in New Zealand and follow New Zealand's strict production standards and fair trading practices.

*Excluding Westcott 1000, Westcott 2000, Westcott 3000, Klondike and Pittsburgh Mk II which are only designed in NZ.





To get the best out of your Masport Wood Fire, we endorse the following tips:

- 1/ Plan ahead stock up on wood 6-12 months before intended use.
- 2/ Gather dense hardwood. Hard woods like jarrah burn more slowly and require less refueling.
- 3/ Select dry hard wood as it makes the fire burn hotter and longer.
- 4/ Choose sound, solid wood avoid rot and excess bark. A good way to tell if wood is ready to burn is to look for signs of radial cracking at the end of a log.
- 5/ Split larger logs to assist drying and burning.
- 6/ Never use seaborne driftwood, pine or chemically treated timber.
- 7/ Stack fuel loosely in a dry place so air can pass freely through the pile.
- 8/ Cover the top and two sides of the stack.
- 9/ Use fuel in order the oldest and driest first.
- 10/ Have your appliance professionally checked and serviced before the Winter begins.

As a sign of our commitment to quality all new Masport fire boxes are guaranteed for 10 years. We warranty our fire boxes to be free from defects in material or workmanship under normal use and service. The Warranty (on the firebox excluding attachments) is for 10 years from the date of purchase.*

Please be aware Masport Woodfires are intended for internal use only, unless otherwise specified.

* 1 year warranty on all internal fire parts

When installed in the correct manner as shown, your Masport Fire will provide a cleaner, more energy efficient warmth. Masport Heating recommends that all installation work be carried out by an authorised installer.



Glen Dimplex Australia Pty Ltd 1340 Ferntree Gully Road, Scoresby, VIC 3179, Australia. Ph: 1300 554 155 Fax: 1800 058 900 masportheating.com.au

Proudly distributed in Western Australia by:

AirGroup Australia 28 Division Street, Welshpool WA 6106, Australia. Ph: (08) 9350 2200 Fax: (08) 9353 4225

airgroup.com.au

Glen Dimplex Australia Pty Ltd's policy is one of continuous development. We reserve the right to change size and specifications without notice. Images shown are for communication purposes only. For confirmation of Masport Heating product details please refer to www.masportheating.com.au. Please refer to the installation and operation instructions before having your Masport Wood Fire installed. A full set of these instructions is supplied with each fire.

Your nearest dealer: