

FIRE BY **escea.**

Installation Instructions and User Guide

EK Series
Escea Fireplace Kitchen

WARNING

THE APPLIANCE & FLUE SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH:

- **AS/NZS 2918**
- **THIS INSTALLATION INSTRUCTION BOOKLET**
- **LOCAL / NATIONAL BUILDING CODES**
- **ANY OTHER RELEVANT STATUTORY REGULATIONS**

LEAVE THESE INSTRUCTIONS WITH THE END USER.

Supplementary Documents

There are additional Design Guide documents which are supplementary to these Installation Instructions. These can be found on the Escea Website under EK- Series, Downloads. These include:

- EK Series Concrete Cavity Design Guide
- Size specific detail sheets for the Concrete Cavity
- EK Series Timber Cavity/ AAC Heat Cell Design Guide
- Size specific guides for the AAC Heat Cell Install Details

Warranty Repair and Annual Servicing

Please contact Escea if you require warranty work. Warranty repair work must be carried out by a suitably qualified person.

All installation work must comply to AS/NZS 2918 Domestic solid fuel burning appliances- Installation AND these installation instructions. Any work undertaken that does not comply to AS/NZS 2918 AND these installation instructions will not qualify for the Escea warranty. Escea will not be accountable for any unsafe installation that does not comply to AS/NZS 2918.

Please contact your local council for updates to AS/NZS 2918 or additional restrictions. The installation must comply to any additional requirements to qualify for the Escea Warranty.

Manufactured by: Escea Ltd, PO Box 5277 Dunedin NZ, Ph: +64 3 478 8220

For contact details of your local Escea distributor or dealer, please visit www.escea.com, call 0800 173 000, or email us at info@escea.com.

From Australia, please visit www.escea.com.au, call AU: 1800 460 832 or WA: 1800 730 140, or email us at info@escea.com

THIS DOCUMENT CONTAINS TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.

WARNING

FAILURE TO FOLLOW THESE INSTRUCTIONS COULD RESULT IN DEATH, SERIOUS BODILY INJURY, AND/OR PROPERTY DAMAGE. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY ALSO VOID YOUR FIRE INSURANCE AND/OR WARRANTY.

A LIT FIRE MUST NEVER BE LEFT UNATTENDED.

THE FIREPLACE MUST ONLY BE USED FOR COOKING/HEATING AS INTENDED.

MAINTAIN AND OPERATE THE FIREPLACE IN ACCORDANCE WITH THESE INSTRUCTIONS.

DO NOT USE FLAMMABLE LIQUIDS OR AEROSOLS TO START OR REKINDLE A FIRE.

DO NOT PLACE ANY COMBUSTIBLES IN FRONT OF THE FIRE AS SOME FIREWOOD MAY SPIT SPARKS.

DO NOT TOUCH THE SURFACES AS THEY CAN BE VERY HOT EVEN AFTER THE FIRE HAS BURNT OUT.

ENSURE CORRECT INSTALLATION AS PER THESE INSTRUCTIONS.

DO NOT MODIFY THE FIRE.

DO NOT OPERATE THE FIRE WITHOUT THE FLUE SYSTEM.

YOUNG CHILDREN SHOULD BE CAREFULLY SUPERVISED WHEN THEY ARE IN THE SAME AREA AS THE COOKING FIRE.

TODDLERS, YOUNG CHILDREN, AND OTHERS MAY BE SUSCEPTIBLE TO ACCIDENTAL CONTACT BURNS AND MUST NOT OPERATE THE COOKING FIRE. A PHYSICAL BARRIER IS RECOMMENDED IF THERE ARE "AT RISK" INDIVIDUALS IN THE VICINITY. TO RESTRICT ACCESS TO A FIREPLACE OR STOVE, INSTALL AN ADJUSTABLE SAFETY GATE TO KEEP TODDLERS, YOUNG CHILDREN, AND OTHER "AT RISK" INDIVIDUALS OUT OF THE AREA AND AWAY FROM HOT SURFACES.

TAKE CARE WHEN INSTALLING TO PREVENT INJURY AS THIS PRODUCT IS HEAVY.

ALWAYS WEAR THE GLOVES PROVIDED WHEN OPERATING THE APPLIANCE.

IMPROPER DISPOSAL OF ASHES MAY RESULT IN FIRES.

CRACKED, BROKEN, EXTENSIVELY CORRODED OR BUCKLED COMPONENTS MAY RENDER THE INSTALLATION UNSAFE.

DO NOT OVER FIRE THE APPLIANCE - FOLLOW FIRE LOADING GUIDELINES.

DO NOT STORE CHEMICALS OR FLAMMABLE MATERIALS NEAR THIS APPLIANCE.

DO NOT SPRAY AEROSOLS NEAR THIS APPLIANCE.

A	Installation Process and Product Details	5
A1	Product Description	5
A2	Product Dimensions	5
B	External Clearances to Combustible Surfaces	8
C	Platform Minimum Requirements	9
D	Concrete Concrete Block Structure Installation	10
D1	Minimum Requirements of Concrete Concrete Block Structure	10
D2	Sealing Requirements	11
D3	Concrete Concrete Block Structure Flue System Installation	12
E	Timber Combustible Structure Installation	13
E1	Minimum Requirements of the Timber Combustible Structure	13
E2	Sealing Requirement	14
E3	Autoclaved Aerated Concrete (AAC) Heat Cell Assembly	15
E4	Timber Combustible Structure Flue System Installation	20
F	Assembling and Installing the Fireplace	22
F1	Gather Installation	22
F2	Securing the Base of the Appliance	23
F3	Assembling the Fireplace	24
F4	Attaching and Removing the Pivot Drawer	25
F5	Using the Weather Cover (Optional Accessory)	26
G	Burning Guide	27
G1	Fuel Selection	27
G2	Starting the Fire	27
G3	Loading the Fire	27
G4	Extinguishing the Fire	27
H	Cooking Guide	28
H1	Cast Iron Instructions	28
H2	Storage	28
H3	Optimal Ember Generation	28
H4	Cooking on the Fire	29
I	Maintenance	31
I1	Chimney Maintenance	31
I2	Recommended Refurbishment Products	31

A Product Details

A1 Product Description


The EK series is an outdoor cooking wood fire with the ability to seamlessly transform from a cooking appliance into a fireplace for entertainment. It is designed for outdoor use ONLY.

A2 Product Dimensions

The EK series consists of three different sizes of fireplace: the EK950, the EK1250, and the EK1550. Dimensions for each fireplace can be found on the next pages.

For more detail, view architectural drawings at www.escea.com or www.escea.com.au.

EK950

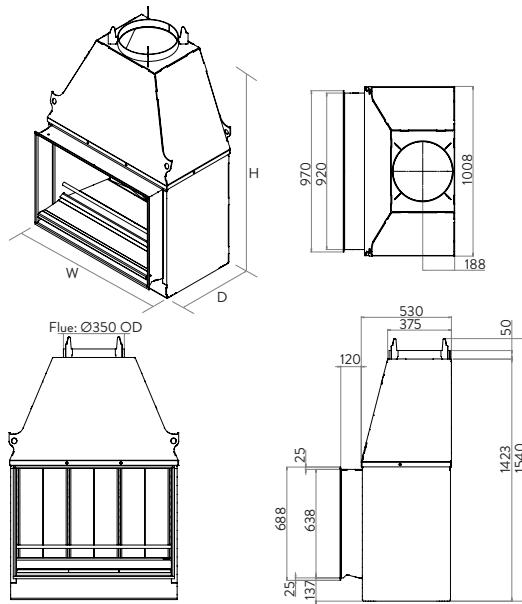


EK950 Specifications	
Appliance Dimensions(mm):	1008W x 1540H x 656D
Appliance Weight(kg):	300

EK950 Minimum Cavity Dimensions	
Minimum Concrete Cavity Internal Dimensions (mm):	1088W x 771D
Minimum AAC Heat Cell External Dimensions(mm):	1280W x 1700H x 896D
Minimum Timber Cavity Internal Dimensions(mm):	1340W x 1800H x 930D

Note: For Concrete or Concrete Block Structure Height dimension refer to section D1.

EK1250

A
B
C
D
E
F
G
H
I
J

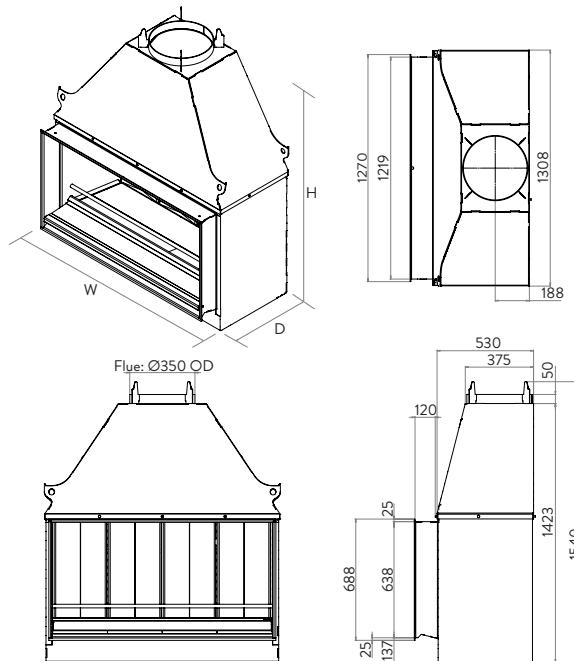

EK1250 Specifications

Appliance Dimensions(mm):	1308W x 1540H x 656D
Appliance Weight(kg):	380





EK1250 Minimum Cavity Dimensions

Minimum Concrete Cavity Internal Dimensions (mm):	1388W x 771D
Minimum AAC Heat Cell External Dimensions(mm):	1580W x 1700H x 896D
Minimum Timber Cavity Internal Dimensions(mm):	1640W x 1800H x 930D

Note: For Concrete or Concrete Block Structure Height dimension refer to section D1.

EK1550

Note: The EK1550 requires two flues to function properly - this is mandatory.

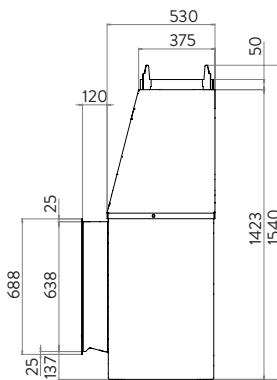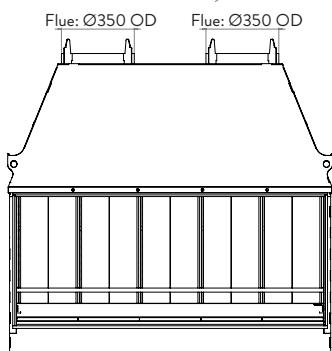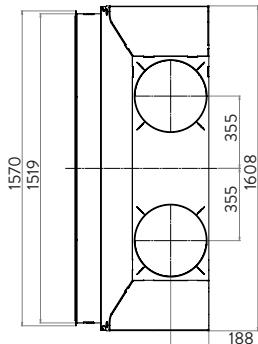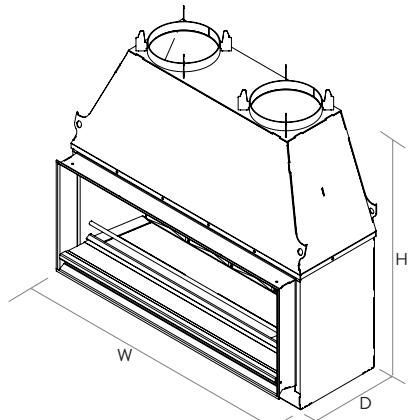

EK1550 Specifications	
Appliance Dimensions(mm):	1608W x 1540H x 656D
Appliance Weight(kg):	450



EK1550 Minimum Cavity Dimensions	
Minimum Concrete Cavity Internal Dimensions (mm):	1688W x 771D
Minimum AAC Heat Cell External Dimensions(mm):	1880W x 1700H x 896D
Minimum Timber Cavity Internal Dimensions(mm):	1940W x 1800H x 930D

Note: For Concrete or Concrete Block Structure Height dimension refer to section D1.

B

External Clearances to Combustible Surfaces

Note: The cavity structure must comply with the relevant section: either section “D1 Minimum Requirements of Concrete / Concrete Block Structure” on page 10 or section “E1 Minimum Requirements of the Timber / Combustible Structure” on page 13, depending on the installation method of choice.

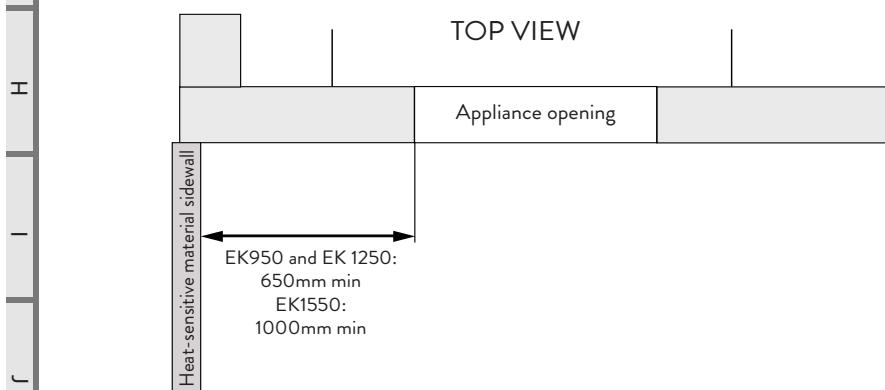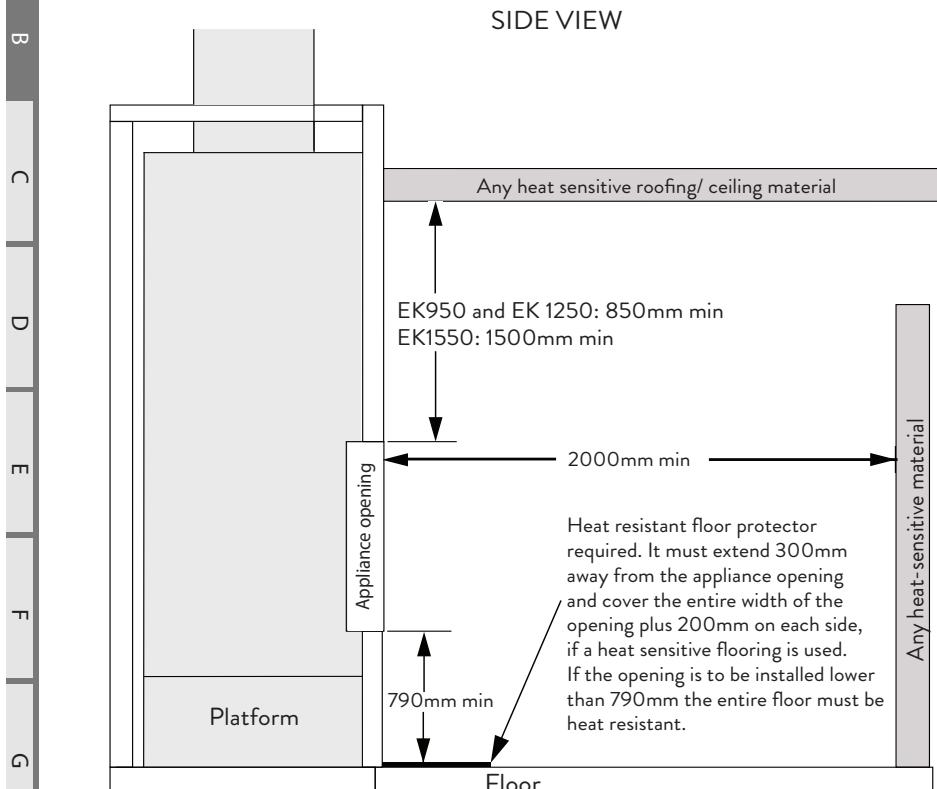

C

Platform Minimum Requirements

The platform must be installed at a height to satisfy the requirements listed in section “B External Clearances to Combustible Surfaces” on page 8.

If the platform is to be constructed of combustible material, the platform must be insulated from the appliance. The insulation requirement depends on the installation method of choice, as follows:

If the appliance is installed into a poured concrete | concrete block structure:


The perimeter of the platform must be insulated from the appliance using either:

- Calcium silicate board (e.g. 9mm Promina)
- AAC material of thickness no less than 75mm and having a minimum thermal resistance/ R-value of no less than $0.52\text{m}^2.\text{K/W}$
- Concrete of a thickness no less than 140mm.

If the appliance is installed into a timber | combustible structure:

The platform must be insulated from the appliance using the required base of the AAC heat cell. See section “E3 Autoclaved Aerated Concrete (AAC) Heat Cell Assembly” on page 15 for details.

View looking down through cavity from above

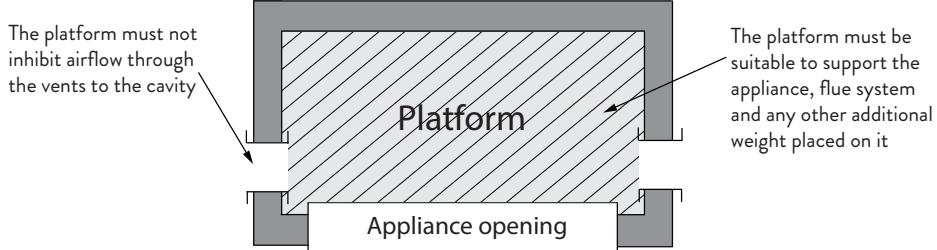

D Concrete | Concrete Block Structure Installation

A

B

C

D

E

F

G

H

I

D1 Minimum Requirements of Concrete | Concrete Block Structure

This appliance is designed for outdoor use ONLY.


If the appliance is installed into a concrete block or poured concrete structure, and the structure forms part of a building, then the entire appliance must be fully enclosed in concrete material of thickness 140mm or greater. Cladding over the concrete structure can consist of any heat resistant material.

When the appliance is installed in a remote, freestanding structure that is not attached to or encompassed within the envelope of the building and is at least 2000mm from any combustible material in any direction, then the enclosure may be constructed from any heat resistant material. If any combustible material is within 2000mm of the fire in any direction, then the enclosure **must** comply with the concrete structure specified below.

Please refer to the EK Series Concrete Cavity Design Guide for more details, which can be found on the Escea website- EK Series- Downloads.

Appliance Minimum Clearances for 140mm thick Concrete Structure

Note: If installing into a heat resistant material other than concrete, or if concrete thickness is less than 140mm- minimum clearance of 2000mm to any heat sensitive material applies.

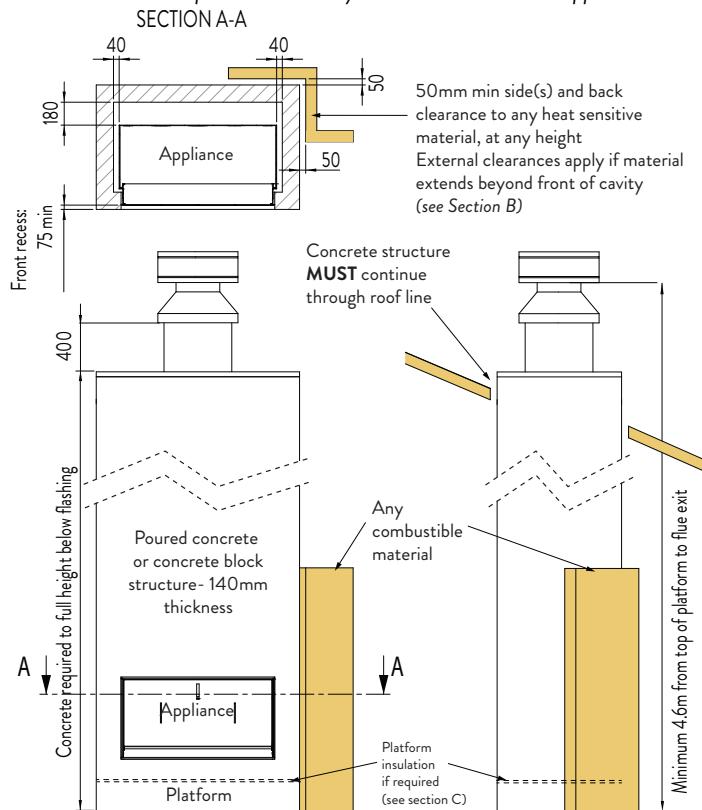

Venting Minimum Requirements for Concrete Structure

For the EK 950 and EK 1250:


The air vent(s) can be any size or shape, provided that the total *combined open surface area* is at least 28,600 mm² (e.g. 2x 135mm dia vents).

For the EK 1550:

The air vent(s) can be any size or shape, provided that the total *combined open surface area* is at least 57,200 mm² (e.g. 4x 135mm dia vents).

Vents are necessary in the structure, not higher than 300mm above the base of the fire. Vents must take air from outside. Venting air exits through the flashing cone (supplied in Escea flue kit).

Note: The EK1250/EK950 are shown as an example; the EK1550 requires two flues.

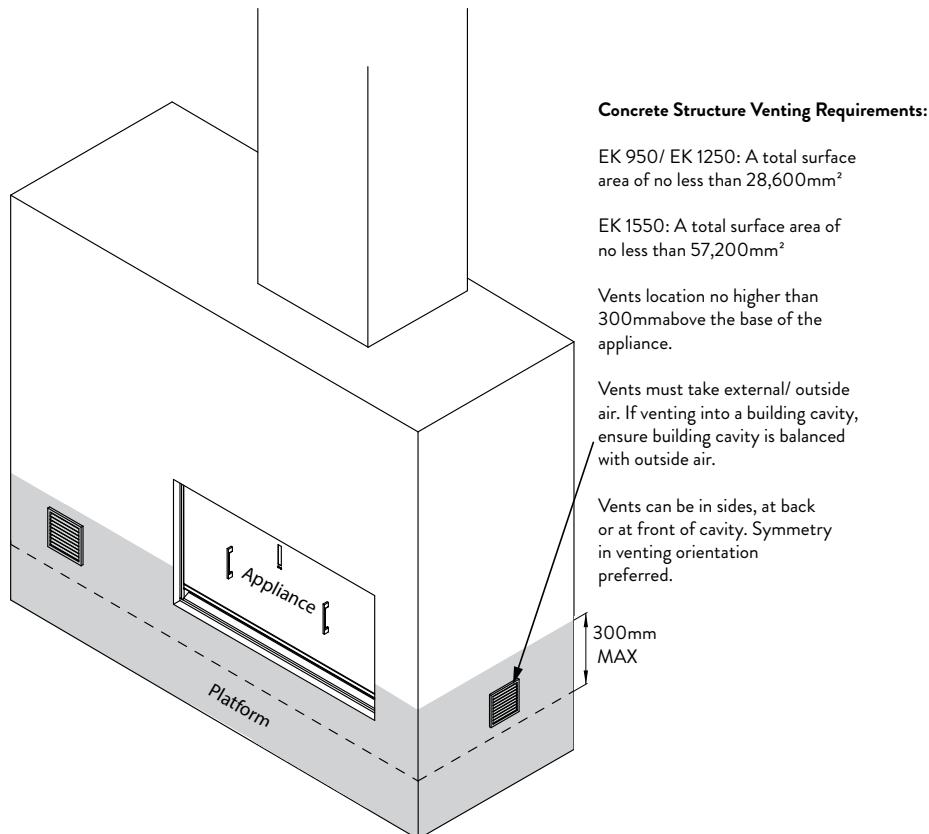

D2 Sealing Requirements


All joints in the flue system and between the gather | chassis should be sealed with a suitable high temperature fire cement sealant | cement that is able to operate at temperatures greater than 500°C.

Care should be taken to ensure that the cavity is weatherproof.

D3 Concrete | Concrete Block Structure Flue System Installation

Flue Specifications

Note: The EK1550 will require two of each item shown below (two flue terminals, two cones, etc.). The EK1250 and EK950 require one of each item shown below.

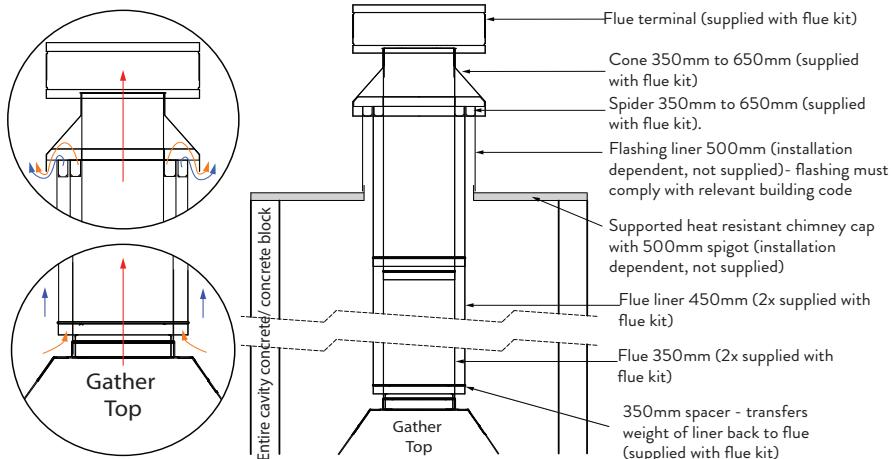


NOTE: THE APPLIANCE & FLUE SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH AS/NZS 2918 AND THESE SPECIFICATIONS.

Flue Installation- Order of Operations

1. Install first length of flue, crimp down to fit into firebox spigot
2. Install first length of liner, crimp up. Liner fits onto tabs welded to firebox gather
3. Repeat steps 1 and 2 with remaining flue(s) and liner(s)
4. Complete flashing of structure
5. Attach spider to final length of flue, such that it spaces off liners appropriately
6. Fit flashing cone
7. Fit cowl

Note: repeat the above process for the EK 1550 (as it has two flue pipes)

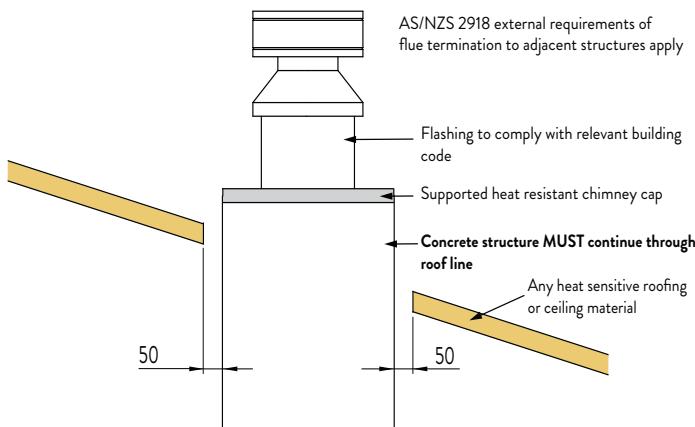


E1 Minimum Requirements of the Timber | Combustible Structure

This appliance is designed for outdoor use ONLY.

If installing into a timber/combustible structure, and the appliance forms part of a building or is part of a freestanding structure, the following minimum clearances to combustible materials must be adhered to. Furthermore, the appliance **MUST** be installed with an Autoclaved Aerated Concrete (AAC) heat cell consisting of panels no less than 75mm thick and having a thermal resistance/ R-value of no less than $0.59\text{m}^2.\text{K/W}$. The 'heat cell dropbox' must be installed with the heat cell to comply. For minimum requirements of the heat cell see "Autoclaved Aerated Concrete (AAC) Heat Cell Assembly" on page 15.

Any cladding over the front of the structure (not including the chimney chase structure) must consist of a heat resistant material. Cladding over any other surface of the structure can consist of a combustible material (eg. plywood).

Please refer to the EK Series Timber Cavity/AAC Heat Cell Design Guide for more details, which can be found on the Escea website- EK Series- Downloads.

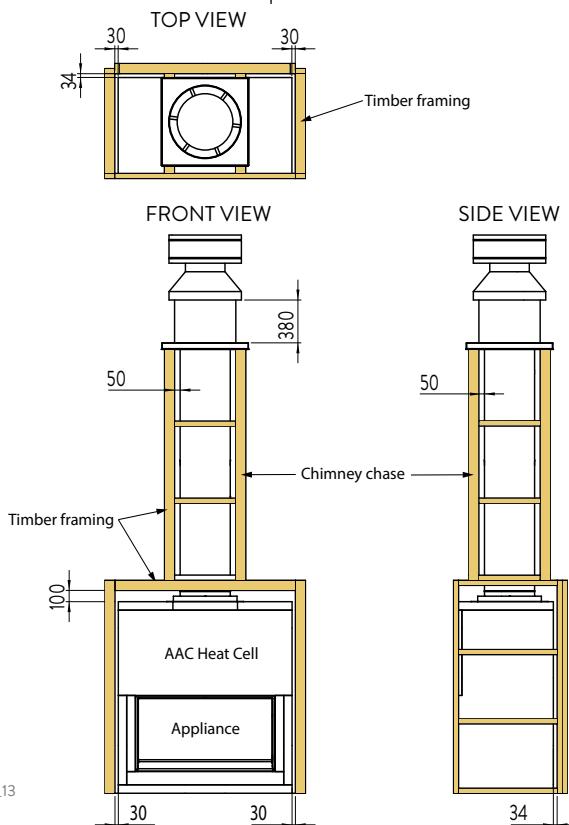Appliance Minimum Clearances for Timber | Combustible Structure

Venting Minimum Requirements for Timber | Combustible Structure

A

For the EK 950 and EK 1250:

The air vent(s) can be any size or shape, provided that the total *combined open surface area* is at least 35,300 mm² (eg. 2x 150mm dia vents).

B

For the EK 1550:

The air vent(s) can be any size or shape, provided that the total *combined open surface area* is at least 70,600 mm² (eg. 4x 150mm dia vents)

C

Vents are necessary in the structure, not higher than 300mm above the base of the fire. Vents must take air from outside. Venting air exits through the flashing cone (supplied in Escea flue kit).

D

Note: The EK1250/EK950 are shown as an example; the EK1550 requires two flues.


E

F

G

H

J

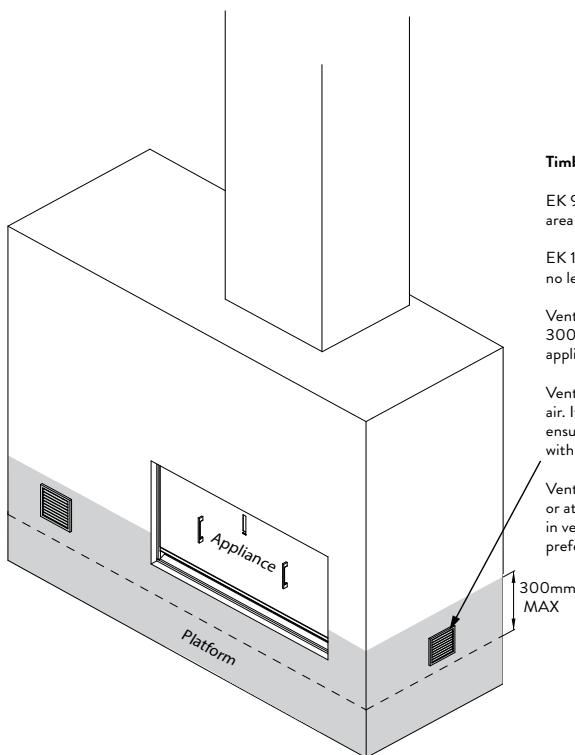

Timber Structure Venting Requirements:

EK 950/ EK 1250: A total surface area of no less than 35,300mm²

EK 1550: A total surface area of no less than 70,600mm²

Vents location no higher than 300mm above the base of the appliance.

Vents must take external/ outside air. If venting into a building cavity, ensure building cavity is balanced with outside air.

Vents can be in sides, at back or at front of cavity. Symmetry in venting orientation preferred.

E2 Sealing Requirement

All joints in the flue system and between the gather / chassis should be sealed with a suitable high temperature fire cement sealant / cement that is able to operate at temperatures greater than 500°C.

Care should be taken to ensure that the cavity is weatherproof.

E3 Autoclaved Aerated Concrete (AAC) Heat Cell Assembly

Minimum Requirements of the Heat Cell

The AAC heat cell MUST be constructed around the appliance if installing into a timber/ combustible structure. AAC panels MUST be at least 75mm thick and must give a thermal resistance/ R-value of no less than $0.59\text{m}^2\text{.K/W}$. The base of the heat cell must be constructed to the minimum dimensions prescribed to insulate the platform from the appliance. The 'heat cell dropbox' (supplied separately) MUST be installed with the heat cell to comply.

There should be a recess from the front of the heat cell to the front of the fire of no less than 35mm.

For the EK 950 and EK 1250, vents should be cut at the base of the heat cell, either in the sides or back panel, with an area of no less than $24,000\text{mm}^2$. For the EK 1550, the venting area must be no less than $48,000\text{mm}^2$. *Note: the venting requirement for the heat cell is different from the structure venting requirements.*

Note: Heat cell assemblies in this manual represent the minimum dimensions and are a guide only. The models have a 35mm recess to the front of the fire.


Heat Cell Construction Recommendations

Heat cell panels should be screwed together and bonded with a certified mortar (recommended by manufacturer) to ensure a tight seal.

The models shown in this document have a 5mm clearance from the AAC material to the firebox front flange, which should be altered depending on the chosen finishing method for the heat cell. Follow manufacturer's recommendations regarding finishing of the AAC material.



Note: To prevent the heat cell from cracking, it is recommended to light a few small fires first to dry out the AAC material.

EK 950 Heat Cell Dimensions

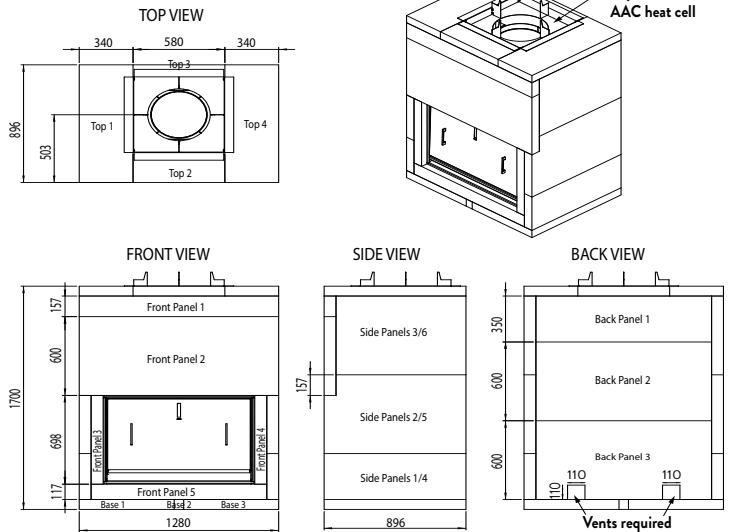


EK 1250 Heat Cell Dimensions


A
B
C
D
E

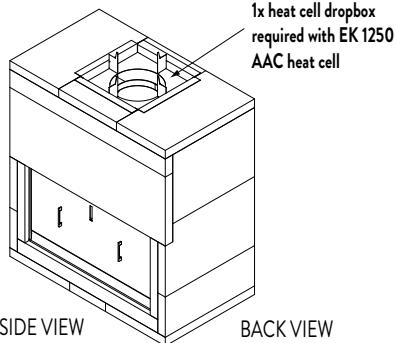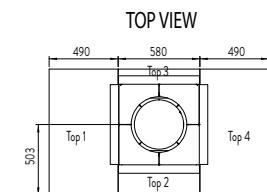


FRONT VIEW

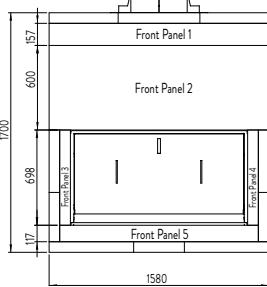

SIDE VIEW


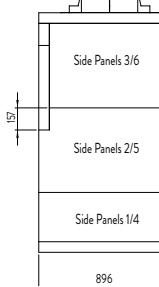


BACK VIEW

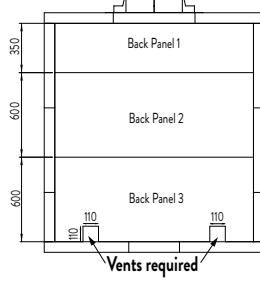


EK 1550 Heat Cell Dimensions


F
G
H
I
J

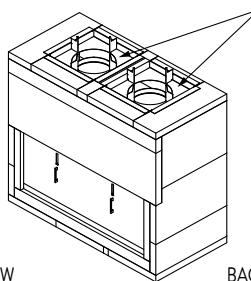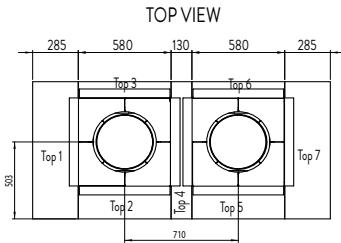


FRONT VIEW

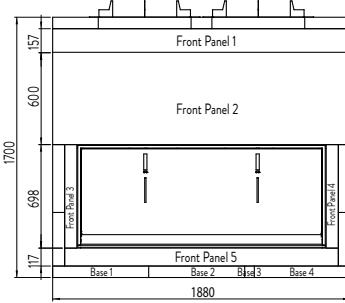






SIDE VIEW

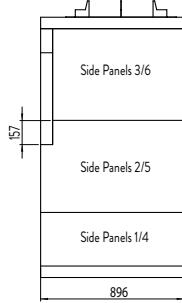

BACK VIEW

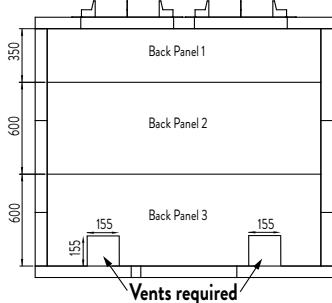







EK 950 Heat Cell Cut Pattern

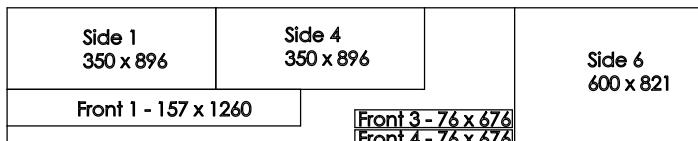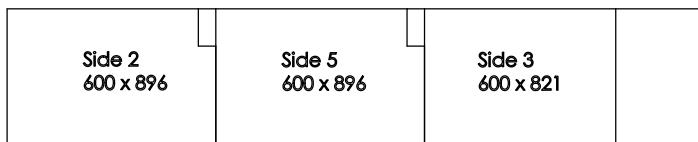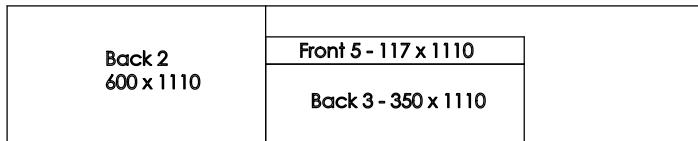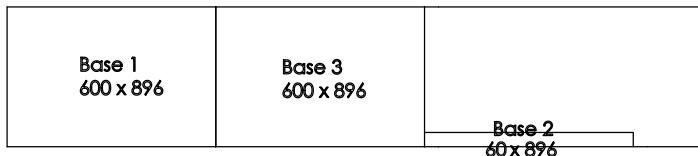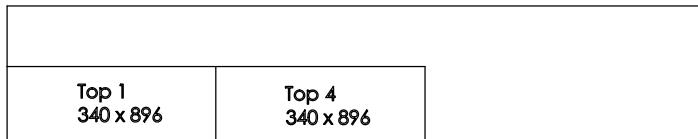

Panels shown are 600mm x 3000mm x 75mm








EK 1250 Heat Cell Cut Pattern

A
B
C
D
E
F
G
H
I
J

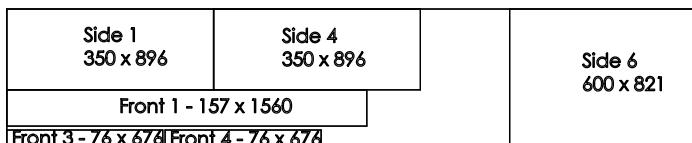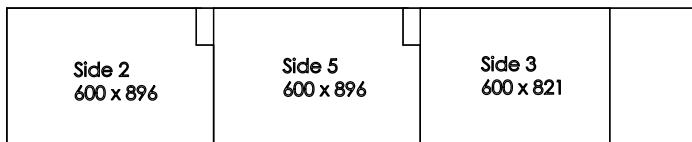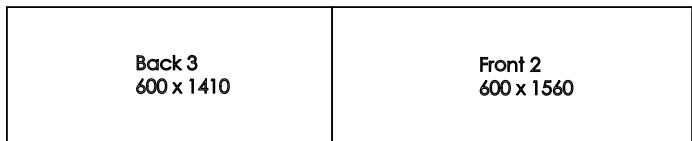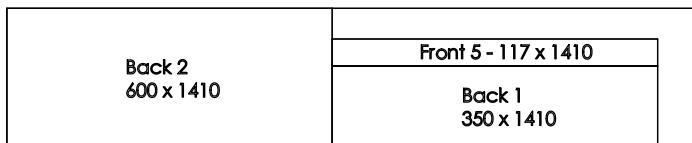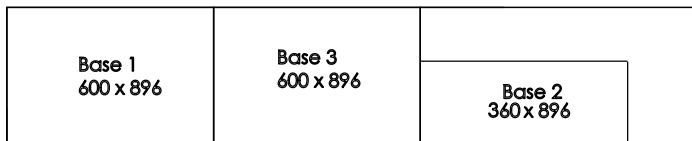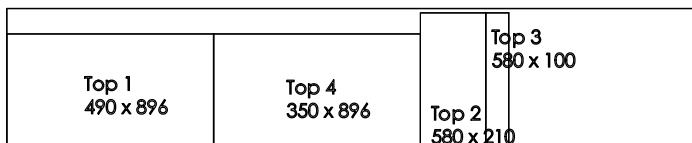

Panels shown are 600mm x 3000mm x 75mm

EK 1550 Heat Cell Cut Pattern

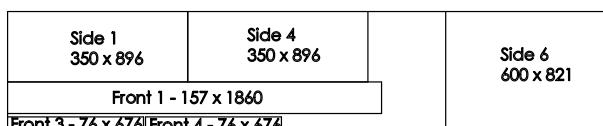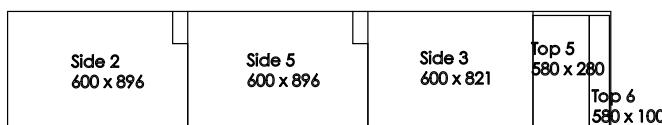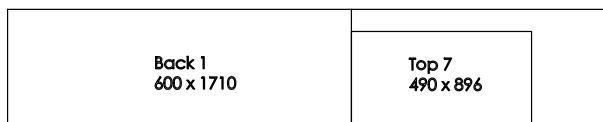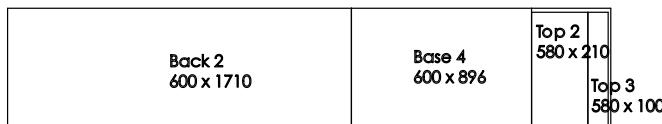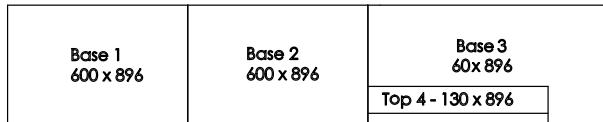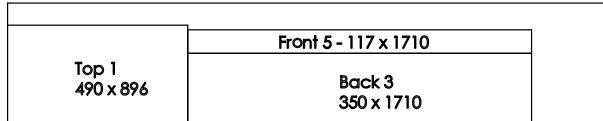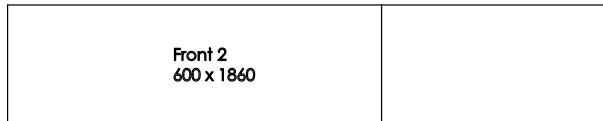

Panels shown are 600mm x 3000mm x 75mm


E4 Timber | Combustible Structure Flue System Installation

A


Flue Specifications

Note: The EK1550 will require two of each item shown below (two flue terminals, two cones, etc.). The EK1250 and EK950 require one of each item shown below.

B

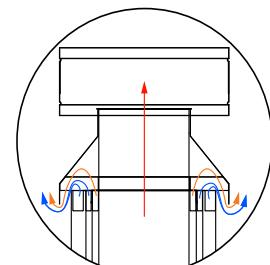

C

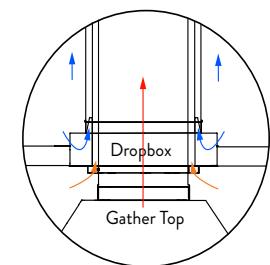

D

E


F

G

H

I

J

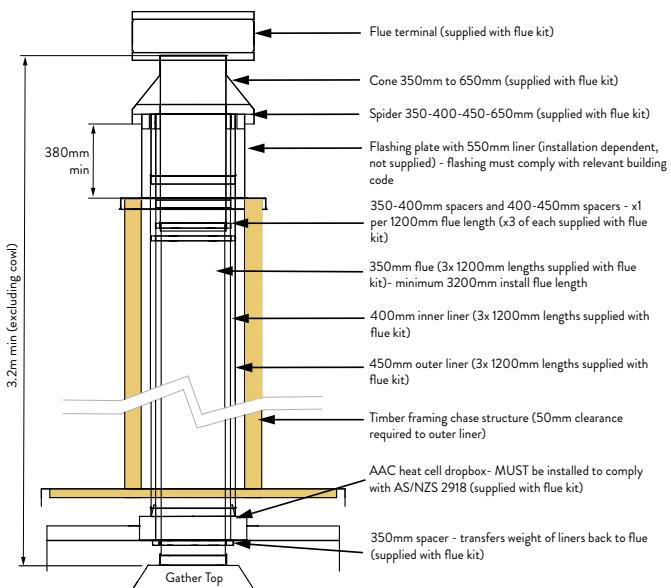

NOTE: THE APPLIANCE & FLUE SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH AS/NZS 2918 AND THESE SPECIFICATIONS


Flue Installation-Order of Operations

1. Place bottom 350 spacer on first length of flue, at height such that the heat cell dropbox will rest on the spacer.
2. Lift heat cell dropbox over flue onto bottom spacer.
3. Install first length of flue together with spacer and dropbox. Install flue crimp down to fit into spigot on firebox gather. Dropbox should fit into square hole at top of heat cell.
4. Place 350-400 spacer onto first length of flue, near top.
5. Install first length of inner liner, crimp up. Liner fits to dropbox, on the inside of the dropbox's upright tabs.
6. Place 400-450 spacer onto first inner liner, near top.
7. Install outer liner, crimp up. Outer liner sits on the dropbox's upright tabs.
8. Install further lengths of flue, inner and outer liners as required.
9. Complete flashing of structure.
10. Attach spider to final length of flue, such that it spaces off liners appropriately.
11. Fit flashing cone.
12. Fit cowl.


Note: repeat the above process for the EK 1550 (as it has two flue pipes).

A
B
C
D
E
F
G
H
I
J

Flashing with Chase Structure

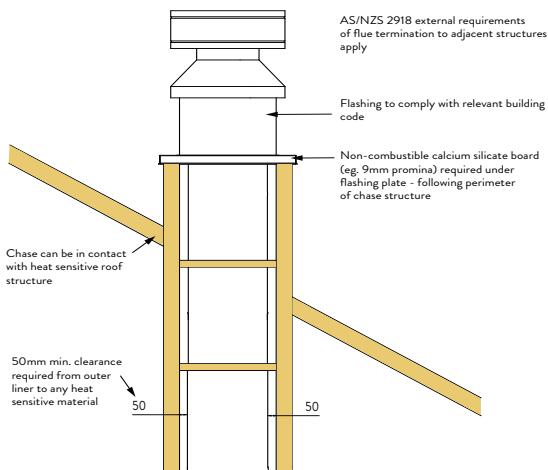


Flashing through Roof

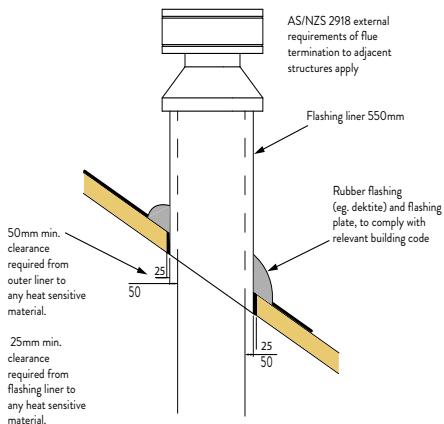

F Assembling and Installing the Fireplace

F1 Gather Installation

The EK Series fires are shipped with most of the interior components packaged and set inside the gather. Remove all of these components and set them aside for later.

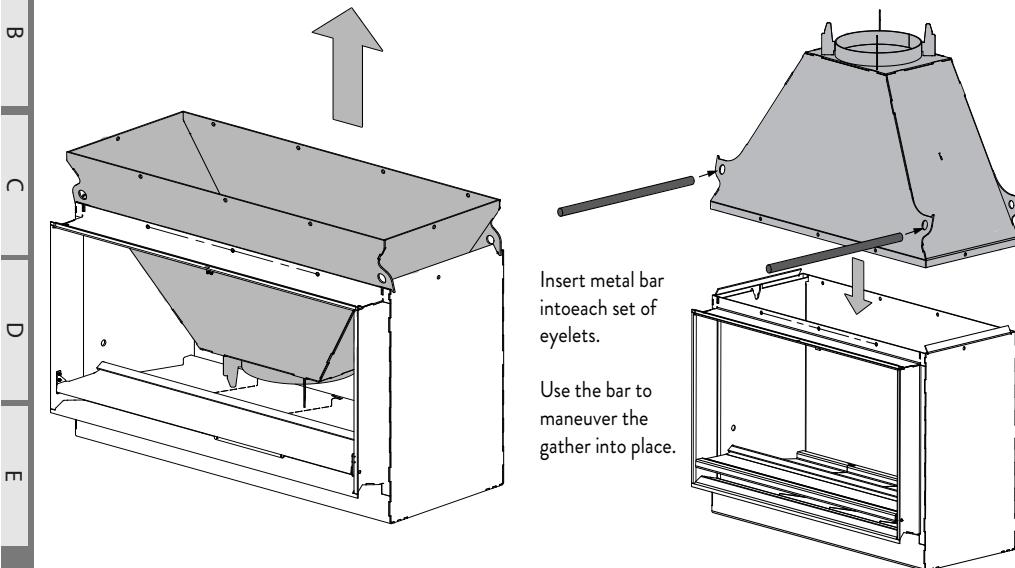


CAUTION: Team or mechanically aided lift required for gather.

Gather Weight
EK950: 60 kg
EK1250: 80 kg
EK1550: 120 kg

Once the gather is in place, attach using the bolts, nuts, and washers provided.


F2 Securing the Base of the Appliance

Begin by removing all of the bricks from the fireplace. Remove the shaded parts below to access the securing holes. The EK1250 has been used as an example; the EK950 and EK1550 would be secured in the same manner.

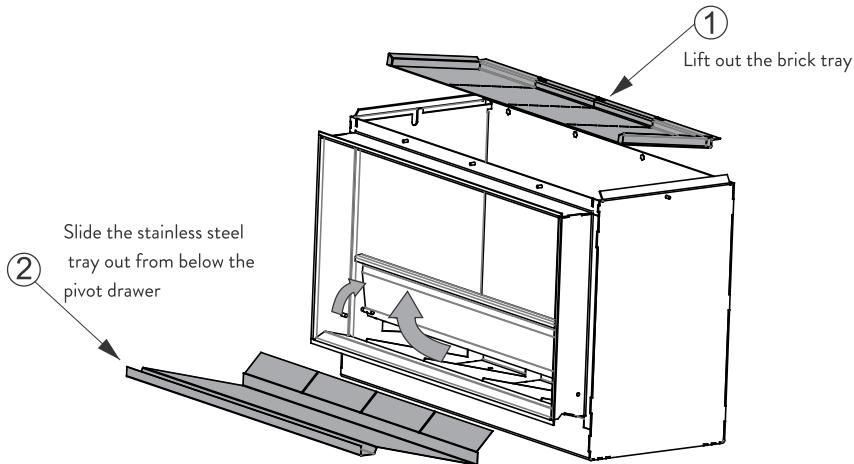

Note: Gather is not pictured

Secure the appliance base suitably using any 4 of the holes circled below.

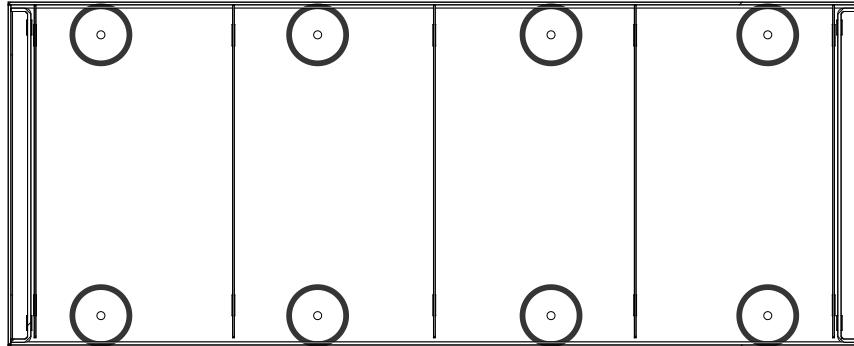


A
B
C
D
E
F
G
H
I
J

F3 Assembling the Fireplace

The EK1250 has been used as an example in the images below. The EK950 will have one fewer panel and racking strip; the EK1550 will have one more panel and racking strip. Unwrap all of the provided parts and remove the plastic film from the stainless steel tray (1).


A
B
C
D
E
F
G
H
I
J

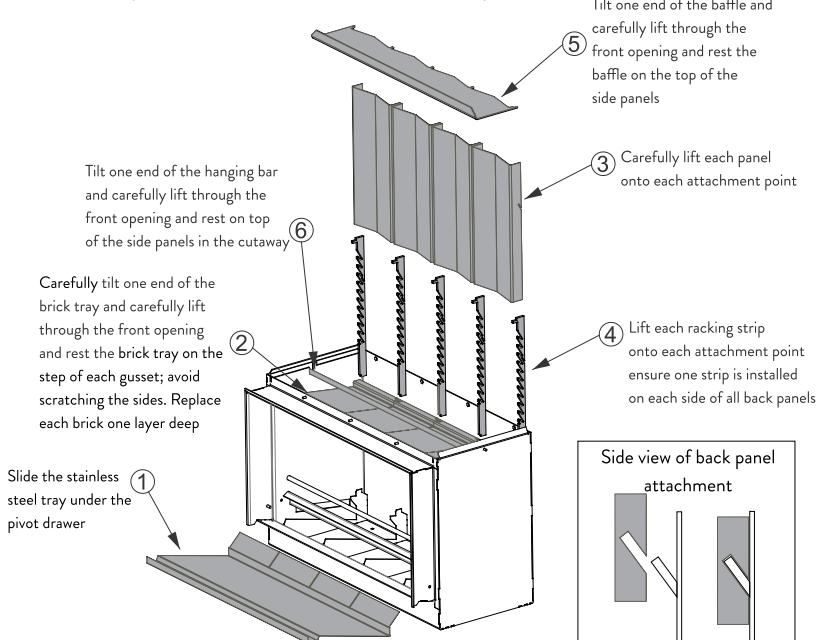

Note: Gather & pivot drawer not pictured

Reinstall the bricks by placing them in the tray behind the round bar. The bricks run from left to right, in three rows. Place the end spacers (LH and RH) either side of the bricks as shown. *Note: For the EK950 there is no end spacer - cut bricks are supplied.*


End Spacer (LH)
Flip orientation for RH spacer

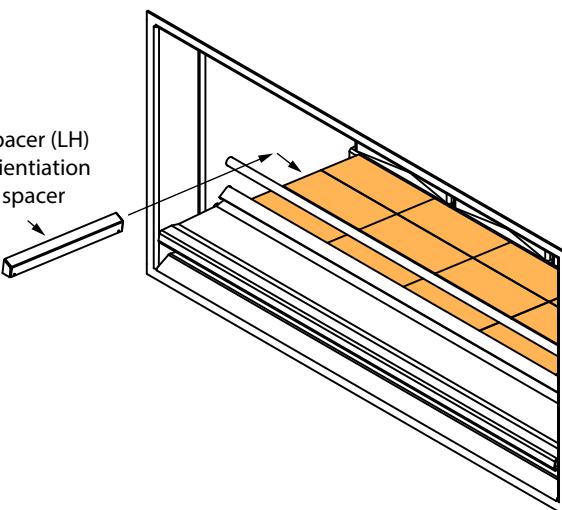

F4 Attaching and Removing the Pivot Drawer

The stainless steel pivot drawer at the front of the fire, shaded grey in the diagram below, can be attached and removed from the fire for cleaning or repair. To remove the drawer, follow the instructions below.

NOTE: Remove the protective plastic film on the pivot drawer prior to burning the fire.

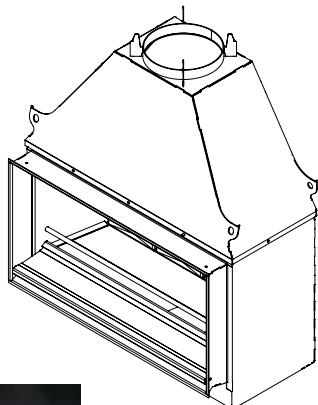

The drawer is centrally located by a spring on both the right and left hand sides.

Flip the drawer up and remove the screw holding the pin in place.



With the screw removed, pull on the pin to remove it. Place one hand beneath the spring to catch it as the pin is removed. Repeat this on the opposite side to remove the other pin. The drawer will now slide out.


To replace the drawer, reverse the above steps.

A
B
C
D
E
F
G
H
I
J


A
B
C
D
E
F
G
H
I
J

F5 Using the Weather Cover (Optional Accessory)


The weather cover (shown below) provides protection from the elements for the interior of the firebox. It is an optional accessory that can be purchased from your local Escea dealer. Ensure that the firebox is cool prior to fitting the weather cover.

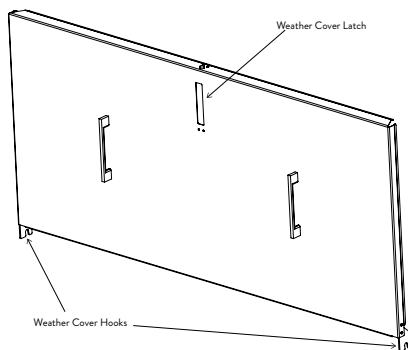

To install the weather cover, position the hooks at the bottom of the weather cover on the pins located on either side of the pivot drawer of the fireplace, as shown below.

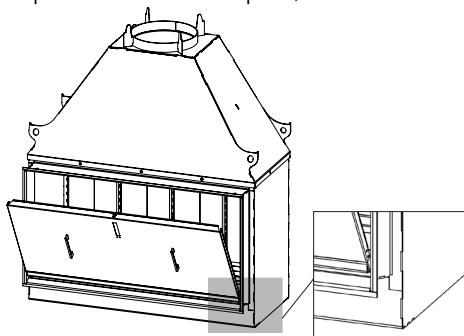

With the bottom hooks in place, rotate the weather cover up until it slides into the top, as shown below. Use the latch to ensure that the weather cover is locked into place.

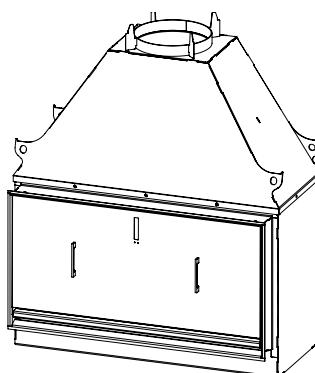

G Burning Guide


G1 Fuel Selection

For optimal wood burning, use firewood with a moisture content of less than 20%.

G2 Starting the Fire

If you are starting your fire for the purpose of cooking, then please proceed to section “H Cooking Guide” on page 28.

To start the fire, stack kindling so that it leans against the back panels, allowing sufficient airflow between pieces. The use of fire-starters is recommended. Continue adding kindling until you have established an ember bed across the entire width of the fire. Use the provided fire poker to arrange the embers across the fire bed.

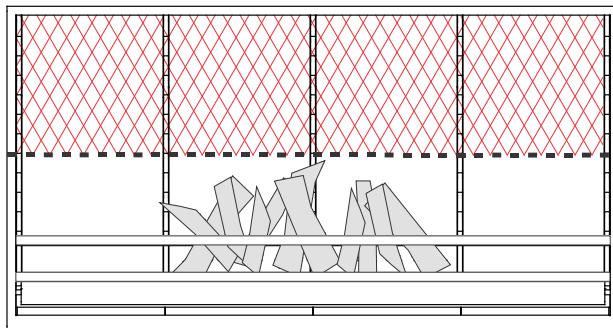

DO NOT load wood higher than 33% the height of the firebox

For an optimal lighting time, stack kindling vertically against the back of the firebox and use fire-starters to ignite the wood in a timely manner.

Note: Expansion/contraction noises during heating up and cooling down cycles are normal and to be expected.

G3 Loading the Fire

Once an ember bed has been established, continue loading larger pieces of firewood onto the fire until the desired temperature or look has been reached. Ensure that all pieces of firewood do not protrude past the bottom stainless steel bar on the fireplace.

Do not load wood higher than 1/3 (33%) of the height of the firebox.

G4 Extinguishing the Fire

Once you have finished with burning the fire, remove all embers and remaining wood pieces from the fire and place them in a fireproof pail. Soak them well. Store them for a minimum of 5 days prior to disposing of them safely.

Supervise the fire until all logs and embers have been removed.

Note: The firebox will remain warm for several hours after the embers have been removed. Use caution when touching any parts of the firebox (i.e. the bricks, pivot drawer, or back panels) and supervise small children until the firebox has cooled completely.

A
B
C
D

F
G

H

H Cooking Guide

A

B

C

D

E

F

G

H

I

J

H1 Cast Iron Instructions


All cast iron parts lock into the grill frames provided with the appliance. Ensure that they are securely set prior to cooking.

The cast iron parts supplied are coated in a vitreous enamel. In the event of decay or chipping, the cast iron can be seasoned by rubbing a thin layer of oil on the cast iron and heating the surface.

Seasoning will protect the surface from rusting and reduce the likelihood of food sticking to the surface.


H2 Storage

The EK range of fireplaces is designed to allow storage of cooking implements within the fire. To access the storage area, lift the pivot drawer as shown in the diagram below.

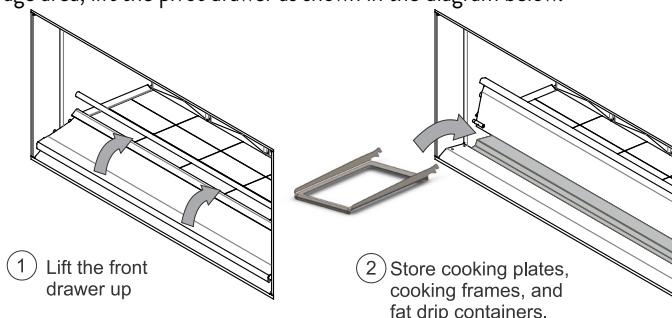

H3 Optimal Ember Generation


The most efficient way to cook on a wood fire is over a consistent bed of embers. To achieve this, an ember generation box has been provided. To begin, affix the ember generator to any of the racking sets on the back of the fireplace and follow the instructions below.

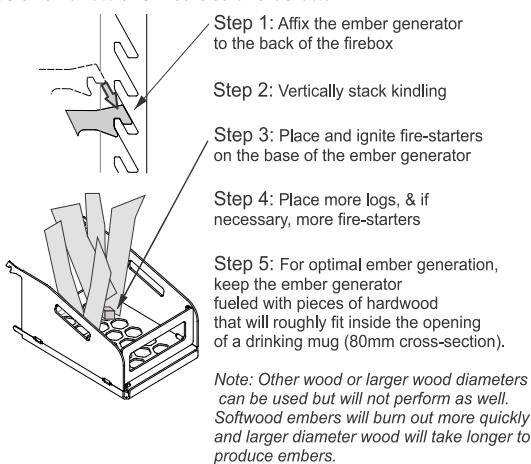


Continue to load the ember generator with wood. Use the fire poker provided to get embers to fall through the grate on the bottom of the ember generator.

H4 Cooking on the Fire

Begin by positioning the desired number of cooking plates at the desired height in the fire. For a warmer grill, position the cooking grills closer to the bottom of the fire. For lower heat, position the cooking grills higher.

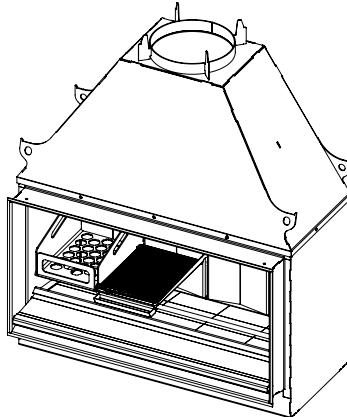

For the slotted grill, it is best to position the fat drip tray on the front of the grill prior to cooking. The fat drip tray will collect any grease drips to provide easy cleanup. Align the hooks of the fat drip tray with the slots in the grill, then pull forward and hook the fat drip tray to the grill frame.

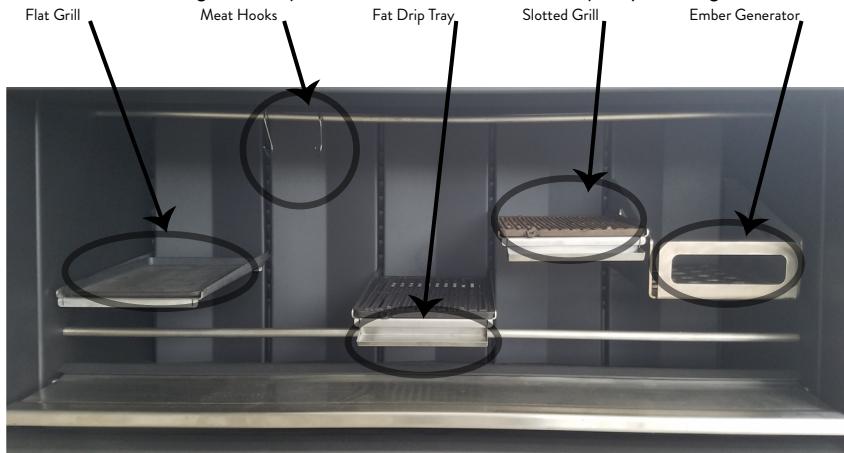

To heat the grills, use the fire poker to scrape the embers from under the ember generator to beneath the desired grill. Continue to load the ember generator so that fresh embers continue to drop through the grate. To maintain heat, continue to scrape fresh embers beneath the cooking area until cooking is complete.

A
B
C
D
E
F
G
H
I
J

A The EK range also comes with meat hooks, as shown in the image above, that can be used to hang and cook large pieces of meat (for example, a whole chicken). The process is the same as with the grills; scrape embers beneath the meat hooks to cook the meat.

B It is also possible to use damp wood chips (i.e. cedar, hickory, etc.) thrown directly onto the embers to provide a smoky flavour to the cooking food.

C Once you have finished cooking, remove all cooking trays and the ember generator prior to using the fire for standard outdoor heating.

D Use the provided gloves when handling the hot cooking trays and the ember generator. Heat will begin to transfer through the gloves after 30 seconds. It is recommended to move the hot trays within 30 seconds. It is also possible to scrape the embers away from the ember generator and cooking trays to allow them to cool; it takes approximately 20 minutes to be able to move them without the heat transferring through the gloves.

Maintenance

I1 Chimney Maintenance

The chimney must be inspected & cleaned at least once per year.

A chimney fire can permanently damage your chimney system; this damage can only be repaired by replacing the damaged component parts.

Chimney fires are not covered by the warranty.

I2 Recommended Refurbishment Products

Stovebright Metallic Black Spray Paint or Senotherm UHT 600 Black High Temp Spray Paint

This product may be used on all black painted surfaces and is available from your Escea dealer.

Before application, ensure any corrosion is removed by a wire brush; also ensure that the surface is clean and free of any dust.

There is no guarantee the parts can be returned to a new finish.

Autosol Metal Polish

This product may be used on any stainless steel surfaces and applied with a soft cloth.

There is no guarantee the parts can be returned to a new finish.